



## “GRF C” flange series

The GRF C series has the same characteristics as the BF series, while being compact in dimension.

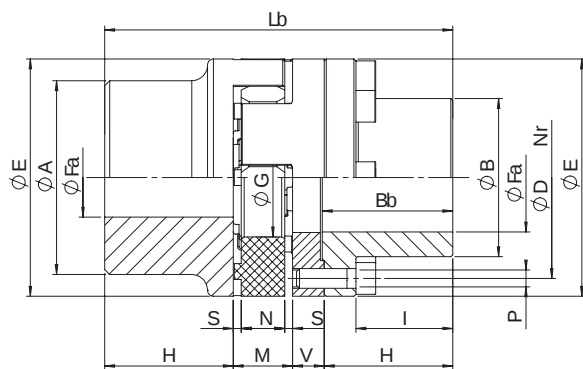

**BFN**

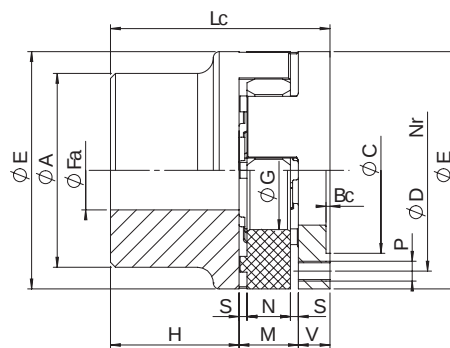

**CFN**

| Type    | Fa<br>min<br>[mm] | Fa<br>max<br>[mm] | E<br>[mm] | A<br>[mm] | B<br>[mm] | H<br>[mm] | I<br>[mm] | Lb<br>[mm] | Lc<br>[mm] | V<br>[mm] | M<br>[mm] | S<br>[mm] | N<br>[mm] | Bb<br>[mm] | Bc<br>[mm] | G<br>[mm] | D<br>[mm] | Nr | C<br>[mm] | P<br>[mm] |
|---------|-------------------|-------------------|-----------|-----------|-----------|-----------|-----------|------------|------------|-----------|-----------|-----------|-----------|------------|------------|-----------|-----------|----|-----------|-----------|
| 24/32   | 8                 | 24                | 55        | 40        | 36        | 30        | 22        | 86         | 56         | 8         | 18        | 2         | 14        | 31         | 1,5        | 27        | 45        | 8  | 36        | M5        |
| 28/38   | 10                | 28                | 65        | 48        | 42        | 35        | 25        | 100        | 65         | 10        | 20        | 2,5       | 15        | 36         | 1,5        | 30        | 54        | 8  | 44        | M6        |
| 38/45   | 12                | 38                | 80        | 66        | 52        | 45        | 35        | 124        | 79         | 10        | 24        | 3         | 18        | 46         | 1,5        | 38        | 66        | 8  | 54        | M8        |
| 42/55   | 14                | 42                | 95        | 75        | 62        | 50        | 38        | 138        | 88         | 12        | 26        | 3         | 20        | 51         | 2          | 46        | 80        | 12 | 65        | M8        |
| 48/60   | 15                | 48                | 105       | 85        | 70        | 56        | 44        | 152        | 96         | 12        | 28        | 3,5       | 21        | 57         | 2          | 51        | 90        | 12 | 75        | M8        |
| 55/70   | 20                | 55                | 120       | 98        | 80        | 65        | 49        | 176        | 111        | 16        | 30        | 4         | 22        | 66         | 2          | 60        | 102       | 8  | 84        | M10       |
| 65/75   | 22                | 65                | 135       | 115       | 94        | 75        | 59        | 201        | 126        | 16        | 35        | 4,5       | 26        | 76         | 2          | 68        | 116       | 12 | 96        | M10       |
| 75/90   | 30                | 75                | 160       | 135       | 108       | 85        | 66        | 229        | 144        | 19        | 40        | 5         | 30        | 87         | 2,5        | 80        | 136       | 15 | 112       | M12       |
| 90/100  | 40                | 90                | 200       | 160       | 142       | 100       | 80        | 265        | 165        | 20        | 45        | 5,5       | 34        | 102        | 3          | 100       | 172       | 15 | 145       | M16       |
| 100/110 | 45                | 115               | 225       | 180       | 158       | 110       | 85        | 295        | 185        | 25        | 50        | 6         | 38        | 112        | 4          | 113       | 195       | 15 | 165       | M16       |
| 110/125 | 55                | 125               | 255       | 200       | 178       | 120       | 94        | 321        | 201        | 26        | 55        | 6,5       | 42        | 122        | 4          | 127       | 218       | 15 | 180       | M20       |
| 125/145 | 55                | 145               | 290       | 230       | 206       | 140       | 110       | 370        | 230        | 30        | 60        | 7         | 46        | 142        | 5          | 147       | 252       | 15 | 215       | M20       |

Valid bore for “P” execution.

### Order form


Shaft side flange “BFN” execution  
Type  
GRFBN 48

For hub “GR” order form please see TRASCO® GR base program

Ring side flange “BFN” and “CFN” execution  
Type  
GRFCFN 48

Nr Number of screws

**BFN**

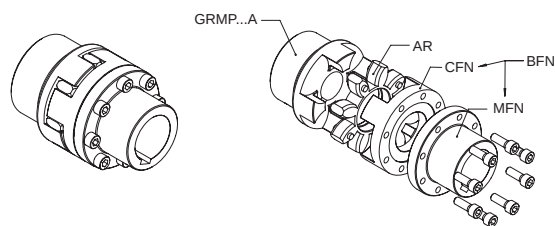

**CFN**

