


Masse de la poulie dentée Top Drive[®] STD, non percée

8M85

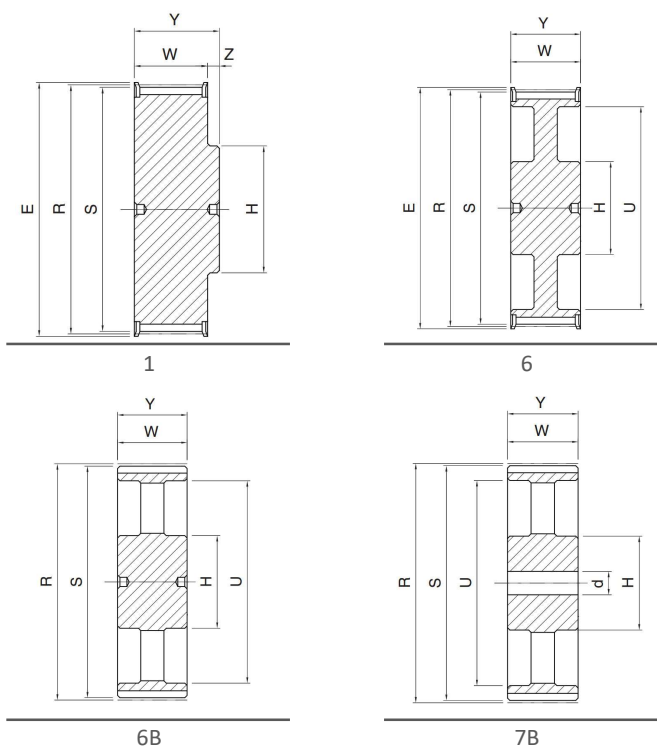

Article	Typ	Zähne	R Ø	S Ø	U Ø	e Ø	W	H Ø	Y	Z	d Ø	Material
22 S 8 M 85	1	22	56.02	54.65	-	62	95	43	105	10	-	acier
24 S 8 M 85	1	24	61.12	59.74	-	67	95	49	105	10	-	acier
26 S 8 M 85	1	26	66.21	64.84	-	73	95	50	105	10	-	acier
28 S 8 M 85	1	28	71.30	69.93	-	77	95	55	105	10	-	acier
30 S 8 M 85	1	30	76.39	75.02	-	84	95	60	105	10	-	acier
32 S 8 M 85	1	32	81.49	80.12	-	88	95	64	105	10	-	acier
34 S 8 M 85	1	34	86.58	85.21	-	94	95	70	105	10	-	acier
36 S 8 M 85	1	36	91.67	90.30	-	98	95	75	105	10	-	acier
38 S 8 M 85	1	38	96.77	95.39	-	104	95	80	105	10	-	acier
40 S 8 M 85	1	40	101.86	100.49	-	108	95	85	105	10	-	acier
44 S 8 M 85	1	44	112.05	110.67	-	121	95	96	105	10	-	Fonte
48 S 8 M 85	1	48	122.23	120.86	-	129	95	104	105	10	-	Fonte
56 S 8 M 85	1	56	142.60	141.23	-	149	95	107	105	10	-	Fonte
60 S 8 M 85	1	60	152.79	151.42	-	158	95	132	105	10	-	Fonte
64 S 8 M 85	6	64	162.97	161.60	137	168	95	100	95	-	-	Fonte
72 S 8 M 85	6	72	183.35	181.97	158	191	95	110	95	-	-	Fonte
80 S 8 M 85	6A	80	203.72	202.35	179	-	95	110	95	-	-	Fonte
84 S 8 M 85	6A	84	213.90	212.53	190	-	95	110	95	-	-	Fonte
90 S 8 M 85	6B	90	229.18	227.81	204	-	95	110	95	-	-	Fonte
112 S 8 M 85	7B	112	285.21	283.83	260	-	95	110	95	-	19	Fonte
144 S 8 M 85	7B	144	366.69	365.32	342	-	95	120	95	-	19	Fonte
168 S 8 M 85	7B	168	427.80	426.42	403	-	95	120	95	-	19	Fonte
192 S 8 M 85	7B	192	488.92	487.54	465	-	95	130	95	-	19	Fonte

POWER TRANSMISSION PRODUCTS

info@sit-antriebstechnik.ch



SitDrive